


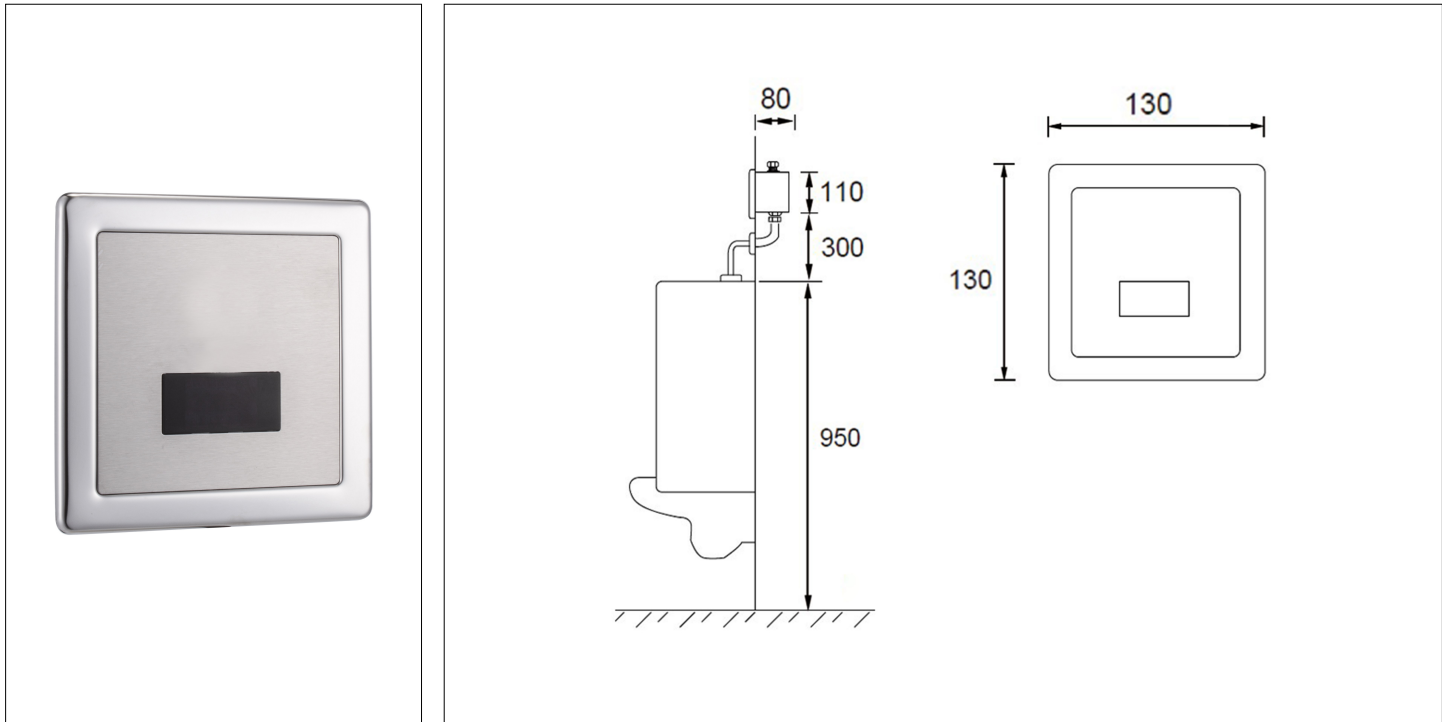

Product code	SLHYRUE2212WCR	Product Family	RUBINETTERIA	Collection	Hybrid
Description	Transformer/battery operated tap For urinal. Built-in for urinal Flow rate: 1.9 liters per flush				
Certifications	TUV UNI EN ISO 9001 system certification. CE declaration of conformity to the European Low Voltage Directive 35/2014. CE declaration of conformity to the European Directive for Electromagnetic Compatibility 30/2014. 				
Prestazioni	1.89 liters per flush.				
Features	Electronic tap with photocell activation. Ideal for private environments, communities and disabled people, it allows for significant water savings and greater hygiene compared to traditional and timed taps. Power supply via 4 AAA batteries. Manually adjustable operating radius. Vandal-resistant. Anti-waste and anti-flooding: the sensor cannot be locked in the open position. If covered for more than 90 seconds, the dispensing stops automatically. To restore normal operation, any obstruction must be removed.				
Finishes	Chrome-plated				
Materials	Brass.				
Dimensioni	175 x 140 x 92				
Installation	Install as per data sheet / installation instructions. Connect electrical and hydraulic supply. Check the tightness of the connections. NOTE No components need to be modified. Use only original components. Do not remove the electrical connectors or the transformer plug. NOTE After connecting the power supply, it is very important not to place hands or objects within the sensor's reading range. Safety information: The device must be mounted by a competent and qualified professional installer. The manufacturer is not responsible for the installation of the product. Keep the product properly clean.				

Maintenance	If the tap leaks, clean the solenoid valve. Carry out adequate cleaning with soap and water, do not use aggressive, abrasive, corrosive products, alcohol, acids, acetone, thinner, etc. Don't scratch. Do not use the product for purposes other than those intended. By disconnecting the power and shorting the sensor you can restore the factory-set reading distance.
Packaging	Packaging: in scatola di cartone. Dimensioni 175 x 140 x 92 mm
Weight	1,5 kg