




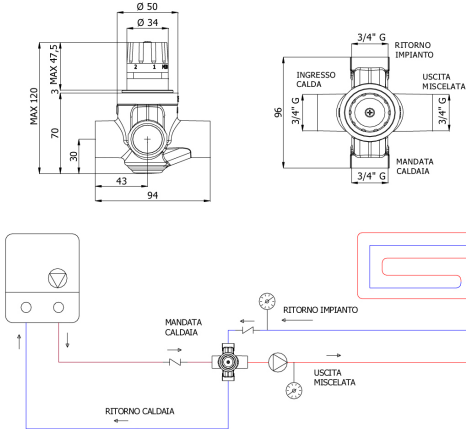


Grafico perdita di carico / portata

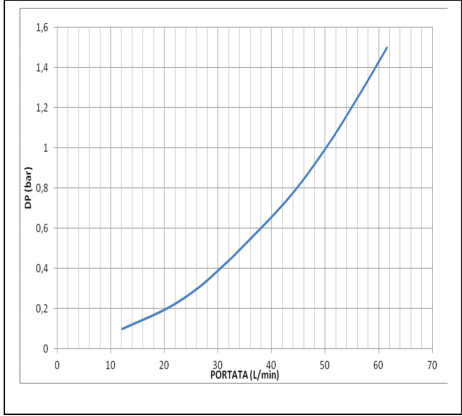

Posizione manopola	MIN	1	2	3	4	5	MAX
Temperatura (°C)	-	25	41	47	52	60	-

Product code	TMR34F4V	Product Family	MISCELATORI INDUSTRIALI	Collection	Various mix
Description	Thermostatic mixer				
Certifications	TUV UNI EN ISO 9001 system certification.				CE
Features	Particularly suitable for use in heating systems where it is necessary to constantly regulate the hot water delivery temperature by partializing the flow rate of the fluid returning from the system and to the boiler/generator. Temperature regulation between 20 and 60 °C. Equipped with a connection dedicated to managing the return to the boiler. Knob positioned on the front for use also in thermoregulation control units. 3/4" F connections.				
Finishes	Yellow.				
Materials	Brass.				
Installation	Connect to the hydraulic system respecting the connections: Hot water inlet = red mark. Cold water inlet = blue mark. Mixed water outlet = Mix. Check the hydraulic seal				
Maintenance	Periodically check the correct fastening of the accessories. To eliminate any limescale formation, immerse the product in white vinegar for a few hours, moving it from time to time. Do not use other types of descalers. Do not disassemble internal components. Do not use the product for purposes other than those intended.				
Weight	0.95				