


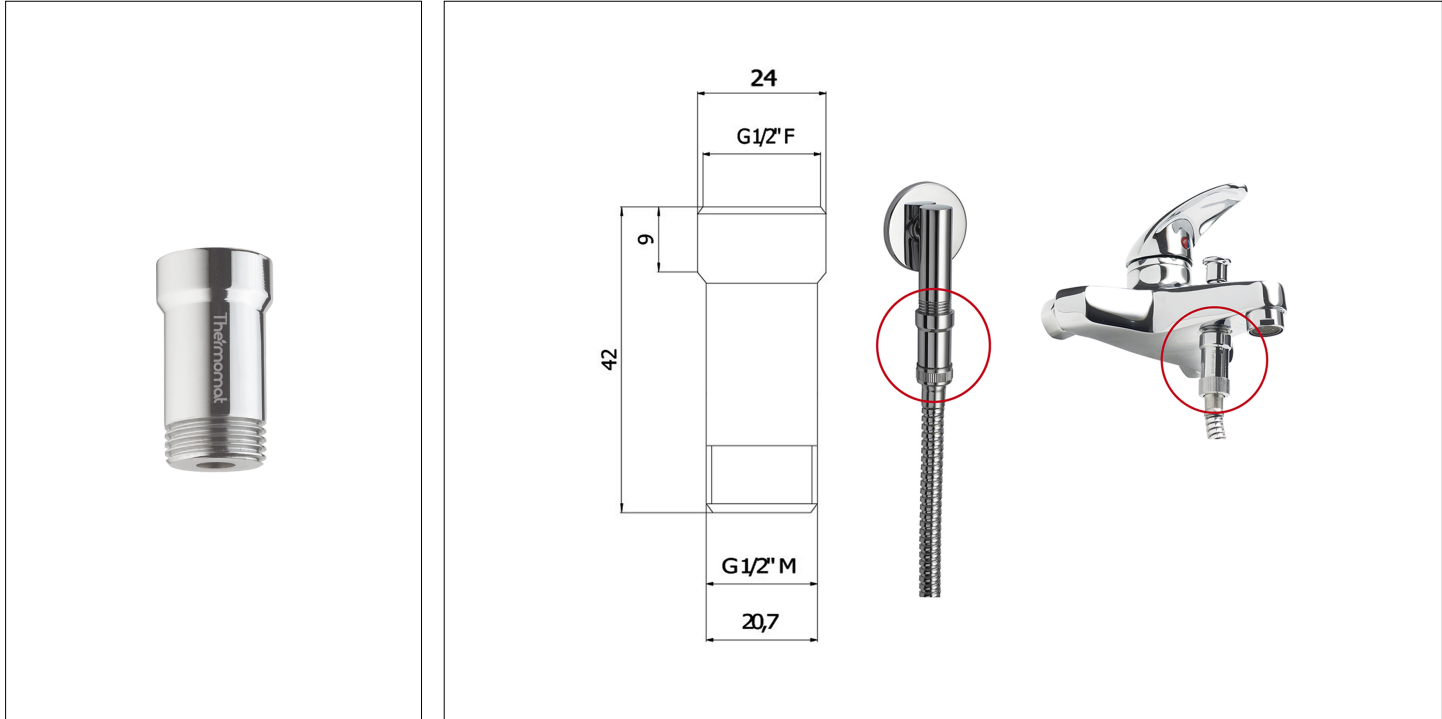

Product code	TNS	Product Family	RUBINETTERIA	Collection	Thermo mix
Description	Anti-scald valve For shower.				
Certifications	TUV UNI EN ISO 9001 system certification.				CE
Features	Anti-scalding device. When the water temperature is above 45°C the flow rate is instantly reduced; simply close the tap and wait a few seconds to return to normal operation. For shower. Maximum operating pressure: 10 bar. Note: For pressures above 5 bar, install a pressure reducer. Recommended pressure: 1–5 bar. Max hot water temperature: 85°C. Patent no. 1380669 1/2" G connections.				
Finishes	Chrome-plated				
Materials	Brass.				
Dimensioni	80 x 80 x 40				
Installation	Connect between hose and hand shower. Connect the water inlets. Check the tightness of the connections.				
Maintenance	Carry out adequate cleaning with soap and water, do not use aggressive, abrasive, corrosive products, alcohol, acids, acetone, thinner, etc. Don't scratch. Do not use the product for purposes other than those intended.				
Packaging	Packaging: single in bubble wrap and cardboard box. Dimensions: 80 x 80 x 40 (mm) Packaging volume: 0,000256 m^3 Weight: 0.1 (kg)				
Weight	0,1 kg				