


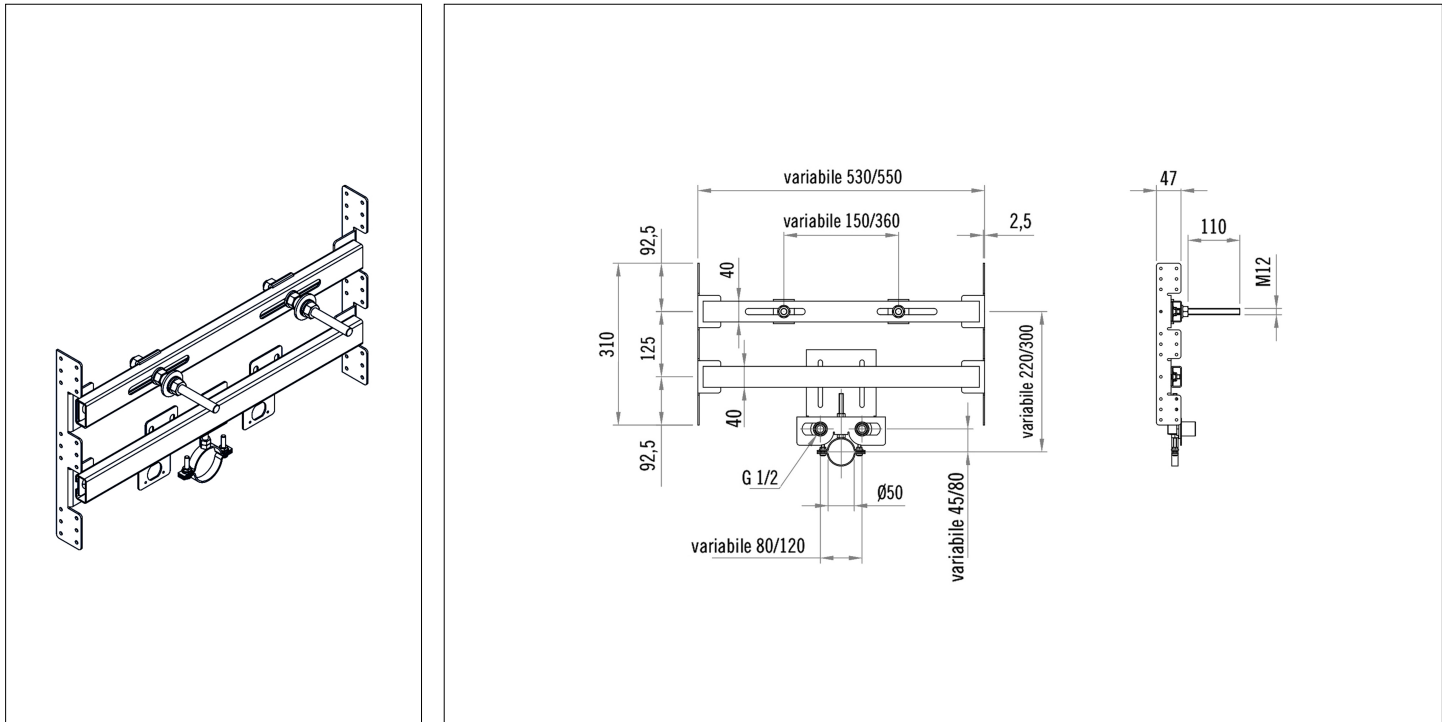

Product code	706	Product Family	LAVABI	Collection	Sanitaryware accessories
Description	Bracket For drywall Wall-hung washbasin support (with direct fixing to the wall).				
Certifications	TUV UNI EN ISO 9001 system certification.				CE
Features	Steel structure from 15/10 to 25/10, galvanized, in compliance with EN 10143 and EN 10346, EN 10305-5. With two M12 threaded rods with adjustable center distance from 150 to 360 mm for mounting the wall-hung washbasin, and a Ø50 mm clamp to support the drain pipes. Bracket for systems with upright spacing of 600 mm, mandatory; the uprights can have telescopic junctions. It can be installed in modular coated plaster structures equipped with vertical uprights with a center distance of 600 mm and a section at C/50/49/47 mm, C/50/74/47 mm, C/50/99/47 mm, C/ 50/124/47mm, C/50/149/47mm.				
Materials	Steel.				
Installation	Screw the side flanges to the plasterboard frame uprights using the supplied 4.2 x 19 self-tapping screws. Cover with plasterboard, leaving the opening for the sink drain free. Safety information: The device must be mounted by a competent and qualified professional installer. The manufacturer is not responsible for the installation of the product. Periodically check that the wall fixing is solid and stable. Keep the product properly clean.				
Maintenance	Do not use the product for purposes other than those intended.				
Weight	4,1 kg				