


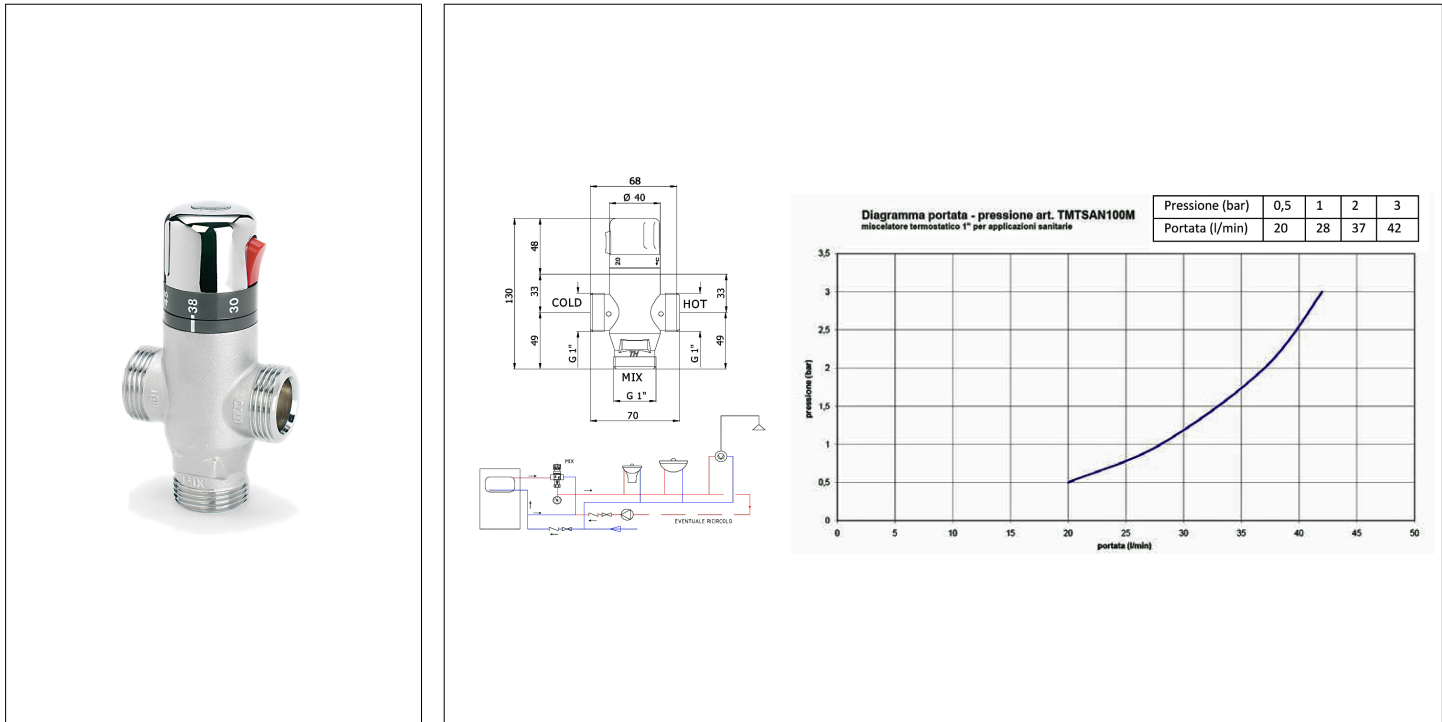

Product code	TMTSAN100MVC	Product Family	MISCELATORI INDUSTRIALI	Collection	Various mix
Description	Thermostatic mixer				
Certifications	TUV UNI EN ISO 9001 system certification.				CE
Prestazioni	Anti-scald function.				
Features	Thermostatic mixer with thermostatic cartridge, for domestic water. Recommended for domestic hot water systems for showers, bathtubs, sinks in homes, schools, hospitals, sports centers, etc.; in case of cold water shortage, it limits the flow of hot water, thereby reducing the risk of accidental scalding. It regulates the water temperature to a pre-set value by mixing hot and cold water even in the event of pressure variations. Replaceable thermostatic cartridge, with fast and precise operation. Knob with graduated scale in °C. Connections 1" M. Inlets also suitable for use with Ø22 mm copper pipe, ferrule, and nut. Calibration reference: Tc=15 °C, Th=65 °C, P=3 bar, Q= 8 l/min, Safety button: 38 °C				
Finishes	Nickel plated.				
Materials	Brass.				
Installation	Connect to the hydraulic system respecting the connections: Hot water inlet = red mark. Cold water inlet = blue mark. Mixed water outlet = Mix. Check the hydraulic seal				
Maintenance	Periodically check the correct fastening of the accessories. Clean the thermostatic cartridge regularly to avoid limescale build-up. Do not use the product for purposes other than those intended.				
Packaging	Packaging: in cardboard box D				
Weight	0.7				