


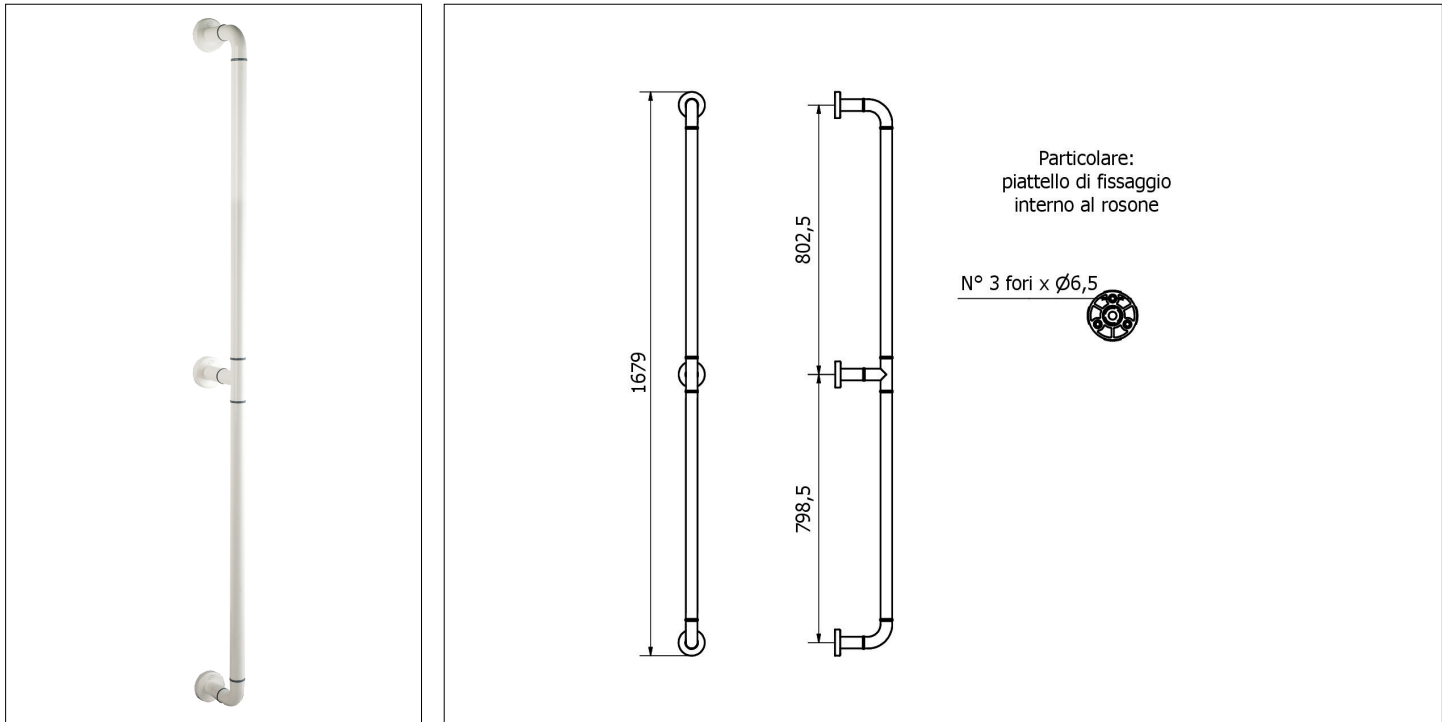

Product code	300-NY-B	Product Family	MANIGLIONI e CORRIMANO	Collection	Nylon
Description	Grab bar Vertical element spanning wall to wall. Electrically insulated. Length 180 cm. Class I medical device.				
Certifications	TUV UNI EN ISO 9001 system certification. Dichiarazione di conformità CE al Regolamento Europeo per i Dispositivi medici 745/2017.				CE
Prestazioni	Capacity 120 kg.				
Features	Body with aluminum core covered in extruded nylon Ø 35 with added antibacterial additive. Complete with fixing plates and rosettes. The fixing plates electrically isolate the product. Partially assembled device to reduce overall dimensions during transport. Molded parts in nylon Ø 35, with the addition of an antibacterial additive. None of the components contain PVC. There are decorative rings in colored nylon. It is possible to apply the SDA hanging seat; in this case the holding capacity is equal to 120 kg.				
Finishes	Glossy white colour.				
Materials	Aluminum. Nylon.				
Dimensioni	230 x 40 x 840				
Installation	Fissaggio a muro tramite n° 9 tasselli. Plugs not included in the package. Choose anchors suitable for the type of masonry. Diametro foro per vite: 6.5 mm. Safety information: The device must be mounted by a competent and qualified professional installer. The manufacturer is not responsible for the installation of the product. Periodically check that the wall fixing is solid and stable. Keep the product properly clean. Keep the batch number shown on the label attached to the product. If the device appears unstable or damaged, it must not be used until it has been inspected and approved by a professional installer.				

Maintenance	Periodically check the correct fastening of the accessories. Carry out adequate cleaning with soap and water, do not use aggressive, abrasive, corrosive products, alcohol, acids, acetone, thinner, etc. Don't scratch. Do not use the product for purposes other than those intended. Disinfect periodically.
Packaging	Packaging: single in bubble wrap and cardboard box. Dimensioni: 230 x 40 x 840 (mm) Volume imballo: 0,00773 m^3 Weight: 2,56 (kg)
Weight	2,56 kg