


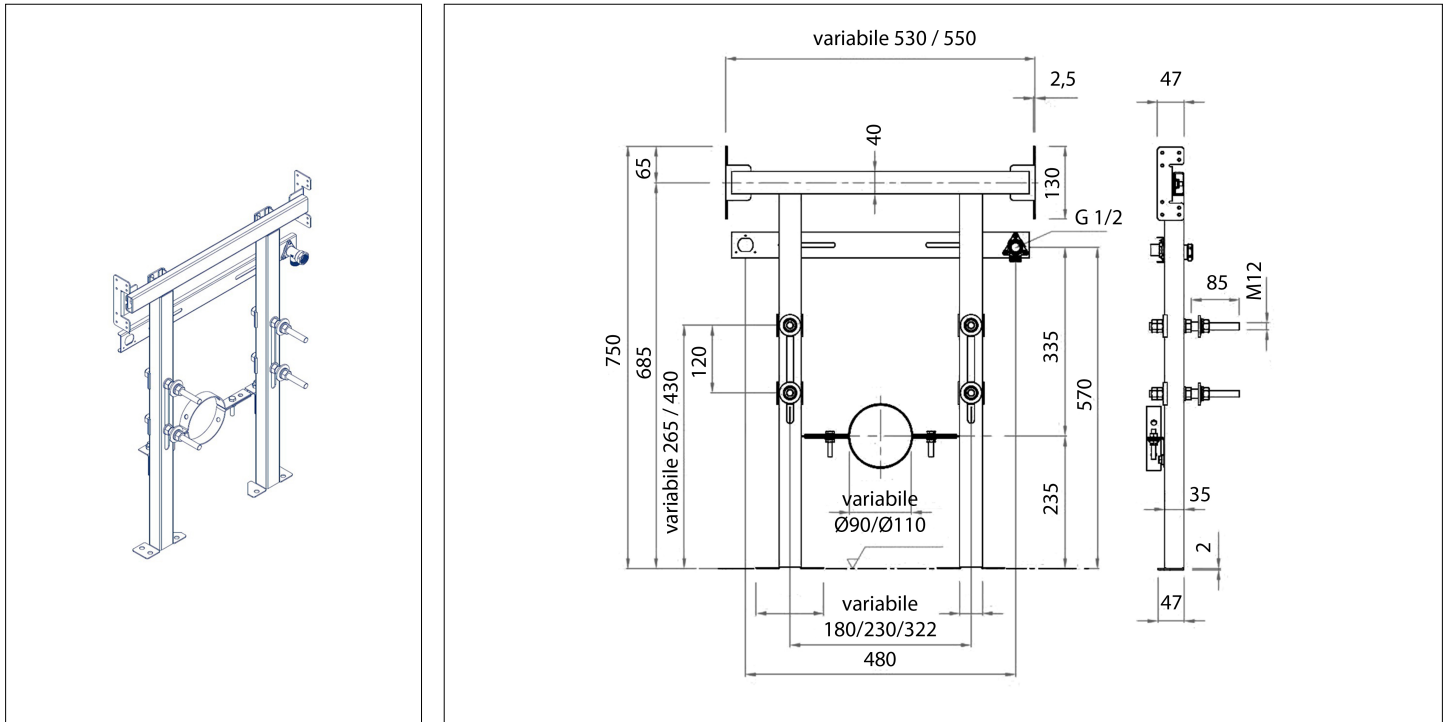

Product code	771	Product Family	SANITARI	Collection	Sanitaryware accessories
Description	Bracket For drywall Wall-hung toilet support with 4 fixing points.				
Certifications	TUV UNI EN ISO 9001 system certification.				CE
Features	Steel structure from 15/10 to 40/10, galvanized, in compliance with EN 10143 and EN 10346, EN 10305-5. With four M12 threaded rods with adjustable center distance from 140 to 230 mm for wall mounting of the wall-hung WC, and one collar to support the inlet and outlet pipes. Bracket for systems with upright spacing of 600 mm, mandatory; the uprights can have telescopic junctions. It can be installed in modular coated plaster structures equipped with vertical uprights with a center distance of 600 mm and a section at C/50/49/47 mm, C/50/74/47 mm, C/50/99/47 mm, C/ 50/124/47mm, C/50/149/47mm.				
Materials	Steel.				
Installation	Screw the side flanges to the plasterboard frame uprights using the supplied 4.2 x 19 self-tapping screws. Cover with plasterboard, leaving the openings for loading and unloading free. Safety information: The device must be mounted by a competent and qualified professional installer. The manufacturer is not responsible for the installation of the product. Periodically check that the wall fixing is solid and stable. Keep the product properly clean.				
Maintenance	Do not use the product for purposes other than those intended.				
Packaging	Imballo in scatola di cartone. Peso: 7,3 kg				
Weight	7,3 kg				