


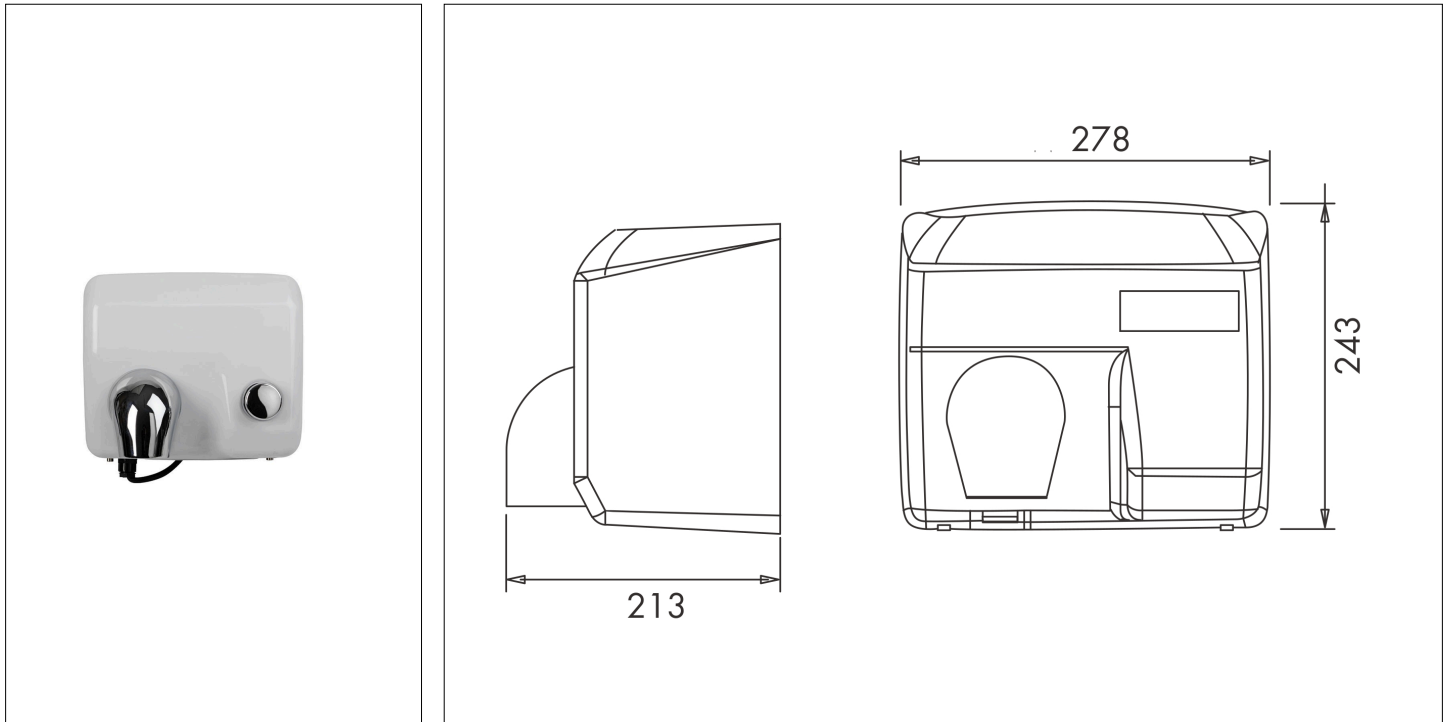

Product code	MP408	Product Family	ACCESSORI	Collection	Community
--------------	-------	----------------	-----------	------------	-----------

Description	Hand dryer Electric. Manually operated. Enamelled.
-------------	--

Certifications	TUV UNI EN ISO 9001 system certification. CE declaration of conformity to the European Low Voltage Directive 35/2014. CE declaration of conformity to the European Directive for Electromagnetic Compatibility 30/2014. 
----------------	---

Prestazioni	Resistance 2400 W or 1700 W in the energy saving version.
-------------	---

Features	Activation via push button. Maximum mechanical robustness, vandal-proof design, with high power and flow rate. Suitable for frequent use in public environments. Adjustable timing from 25 to 180 seconds. Monobloc cladding in AISI 304 15/10 stainless steel with white epoxy paint, fixed to the base with 2 vandal-proof screws. Rear base in 3 mm thick aluminum with 4 Ø 8 mm holes for wall fixing. Anti-vandal chrome nozzle, with 360° rotation, 57 mm outlet diameter with protective grille. 200 W motor, 5500 rpm, universal type, mounted on elastic support, class F; safety thermostat and 120°C self-resetting thermal switch. NiCr heating resistor on mica support, in the fan unit; thermal switch that disconnects at 80°C. Aluminum fan, plastic fan body with fire resistance class V0 according to UL94 regulation. Flow rate 430 m3/h at 53°C, speed 101 km/h. Total power 2400 W. Noise level 70 dB at 2 m. Dimensions: ± 4% compared to what is indicated on the drawing. Cable length 80 cm.
----------	---

Finishes	White colour.
----------	---------------

Materials	Stainless steel.
-----------	------------------

Dimensioni	330 x 300 x H 255
------------	-------------------

Installation	Fix to the wall. Choose anchors suitable for the type of masonry. Connect the plug to a Schuko electrical socket. It is possible to disconnect the power cable to make a direct connection to the underground cables. Safety information: The device must be mounted by a competent and qualified professional installer. The manufacturer is not responsible for the installation of the product. Periodically check that the wall fixing is solid and stable. Keep the product properly clean.
--------------	--

Maintenance	Periodically check the correct fastening of the accessories. Carry out adequate cleaning with soap and water, do not use aggressive, abrasive, corrosive products, alcohol, acids, acetone, thinner, etc. Don't scratch. Do not use the product for purposes other than those intended.
Packaging	Imballo singolo in scatola di cartone 330 x 300 x H 255 mm.
Weight	5,8 kg